



## USB to Serial Converter

### TU-S9 (Version: v1.xR)

This USB to Serial converter allows you to connect a RS-232 serial device such as a modem to a USB port on your Desktop or Laptop PC.

- Connect a RS-232 serial device such as a modem to a USB port on your computer
- Easy installation with Universal Plug and Play
- Supports multiple operating systems



### Features


- Compliant with USB 1.1 specifications
- Supports RS-232 serial interface
- Supports up to 500kbps data transfer rate
- Detects USB suspend condition
- Compliant with Windows 98SE/ME/2000/2003 Server/XP/Vista, Mac 10.x
- Install as a standard Windows COM port, Full RS-232 modem control signals, RS-232 data signals; TxD, RxD, RTS, CTS, DSR, DTR, DCD, RI, GND
- Supports BUS Power, no external power adapter required
- Supports plug & play and easy Installation
- 2-Year Warranty

### Specifications

Hardware	
<b>Interface:</b>	USB 1.1 Type A RS-232 (9-pin) Male
<b>Supported OS:</b>	Windows 98SE/ME/2000/2003 Server/XP/Vista, Mac 10.x
<b>Cable Length:</b>	661mm (26in.)
<b>Cable Gauge:</b>	28/24 AWG
<b>Data Rate:</b>	500kbps
<b>Power Consumption:</b>	500mA (max)
<b>Weight:</b>	75g. (0.2 lb)
<b>Operating Temperature:</b>	0°C ~ 40°C (32°F ~ 104°F)
<b>Storage Temperature:</b>	-10°C ~ 45°C (14° ~ 113°F)

<b>Humidity:</b>	85% (Non-Condensing)
<b>Certification:</b>	FCC, CE

## Networking Solution

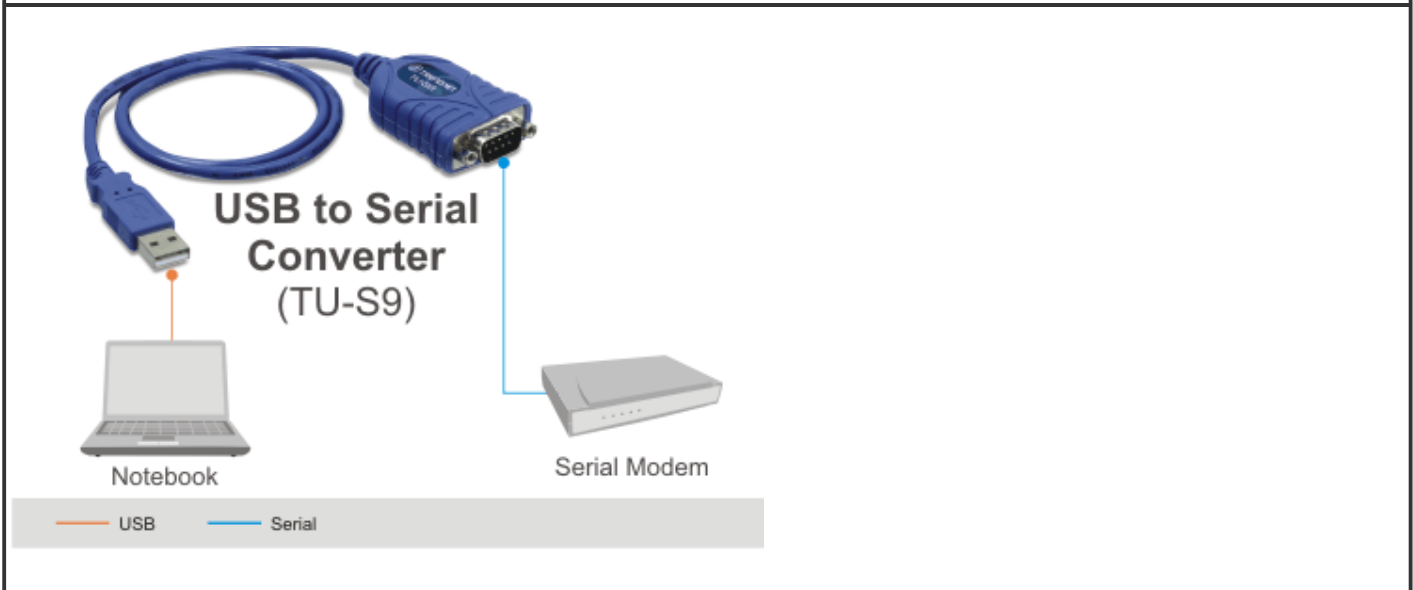

## Package Contents

- TU-S9
- Multi-Language Quick Installation Guide
- Driver CD-ROM

## Ordering Information

20675 Manhattan Place  
Torrance, CA 90501  
USA

Tel: 1-310-961-5500  
Fax: 1-310-961-5511  
Web: [www.trendnet.com](http://www.trendnet.com)  
Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**To Order Please Call**  
**1-888-326-6061**

Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice.  
Copyright © 2008 TRENDnet. All rights reserved.